


EVO | roller™

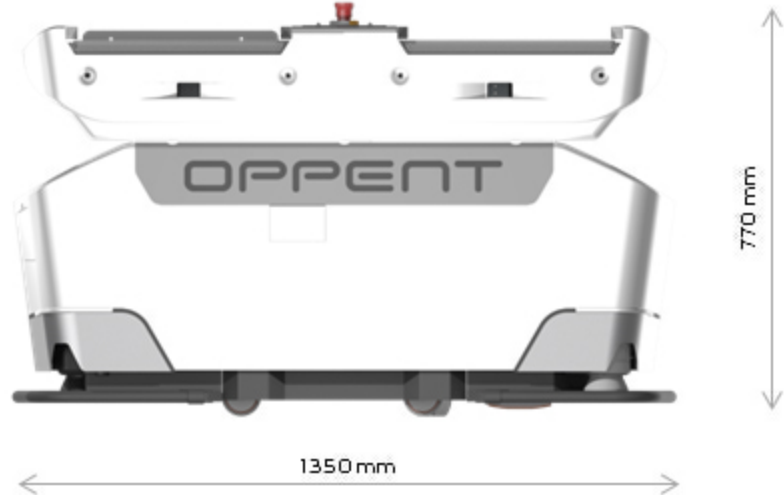

DIMENSIONS (L x W x H)

1350mm x 602mm x 770mm

MAXIMUM PAYLOAD

150 kg + 150 kg

SPEED

0,01 m/s - 1 m/s

MINIMUM BENDING RADIUS

The vehicle is able to rotate on its axis.

AUTONOMY

20 Hours

BATTERY

Pure Lead 24V - 230Ah

SAFETY DEVICES

2 Laser Scanners

NAVIGATION

Odometric closed loop via laser scanner

MAPPING

Auto acquisition

CHASSIS/SHELL MATERIAL

Aisi 304 - Fe360 / Composite Kevlar/Carbon

KINEMATICS

Omnidirectional