


EVO | roller II™

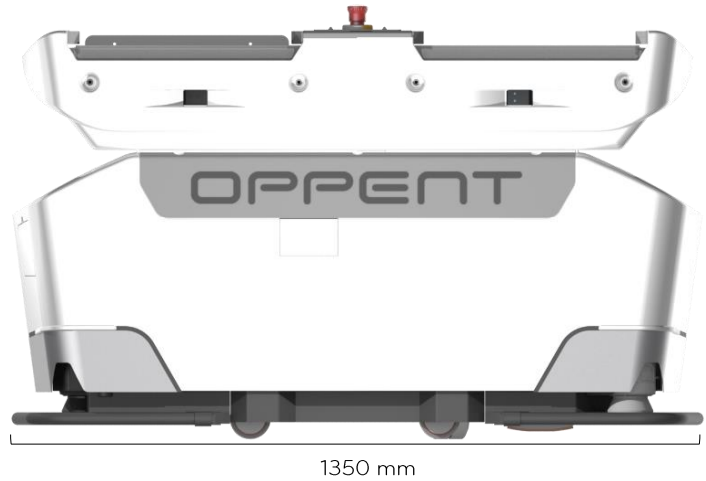

PAYLOAD	150kg + 150kg
SPEED	0,1 m/s – 1 m/s
KINEMATICS*	<ul style="list-style-type: none"> • Bidirectional • Omnidirectional
MINIMUM BENDING RADIUS	The vehicle is able to rotate on its axis
AUTONOMY*	<ul style="list-style-type: none"> • 20 hours • 48 hours
BATTERY*	<ul style="list-style-type: none"> • Pure lead 24V – 230Ah • LiFePO4 24V – 240Ah
SAFETY DEVICES	<ul style="list-style-type: none"> • 2 Laser scanners PL-D • Sensitive board • E-stop
NAVIGATION	Natural navigation
MAPPING	Auto acquisition
MATERIALS	<ul style="list-style-type: none"> • AISI 304 (chassis) • Kevlar/Carbon (shell)

*different solutions available