
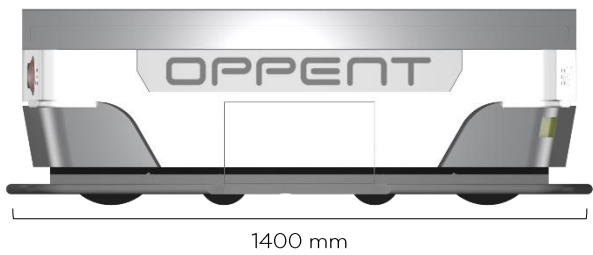


EVO | rollerT™

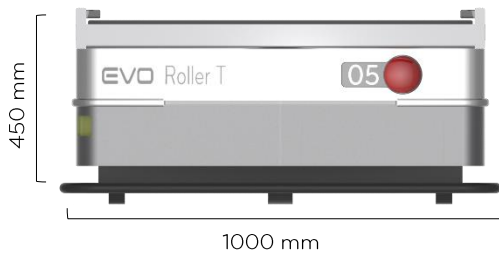

PAYLOAD	1400kg
SPEED	0,1 m/s – 1,4 m/s
KINEMATICS*	<ul style="list-style-type: none">• Bidirectional• Omnidirectional
MINIMUM BENDING RADIUS	The vehicle is able to rotate on its axis
AUTONOMY*	<ul style="list-style-type: none">• 10 hours• 20 hours
BATTERY*	<ul style="list-style-type: none">• Pure lead 24V – 230Ah• LiFePO4 24V – 240Ah
SAFETY DEVICES	<ul style="list-style-type: none">• 2 Laser scanners PL-D• Sensitive board• E-stop
NAVIGATION	Natural navigation
MAPPING	Auto acquisition
MATERIALS	<ul style="list-style-type: none">• AISI 304 (chassis)• Kevlar/Carbon (shell)

*different solutions available

OPPENT