


EVO | base™

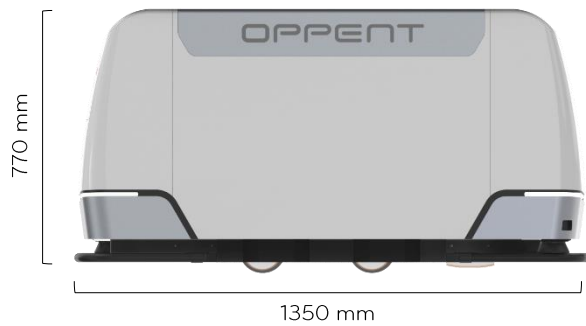

PAYLOAD	400kg
SPEED	0,1 m/s – 1,4 m/s
KINEMATICS*	<ul style="list-style-type: none"> • Bidirectional • Omnidirectional
MINIMUM BENDING RADIUS	The vehicle is able to rotate on its axis
AUTONOMY*	<ul style="list-style-type: none"> • 20 hours (vehicle only) • 40 hours (vehicle only)
BATTERY*	<ul style="list-style-type: none"> • Pure lead 24V – 230Ah • LiFePO4 24V – 240Ah
SAFETY DEVICES	<ul style="list-style-type: none"> • 2 Laser scanners PL-D • Sensitive board • E-stop
NAVIGATION	Natural navigation
MAPPING	Auto acquisition
MATERIALS	<ul style="list-style-type: none"> • AISI 304 (chassis) • Kevlar/Carbon (shell)

*different solutions available